

U61705

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)


PCT

(10) International Publication Number
WO 2004/016905 A1

- (51) International Patent Classification⁷: **E21B 43/10**, C09J 5/04
- (21) International Application Number: PCT/EP2003/008843
- (22) International Filing Date: 8 August 2003 (08.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02255562.7 8 August 2002 (08.08.2002) EP
- (71) Applicant (for all designated States except CA, US): **SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).
- (71) Applicant (for CA only): **SHELL CANADA LIMITED** [CA/CA]; 400, 4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **LOHBECK, Wilhelmus, Christianus, Maria** [NL/NL]; Volmerlaan 8, NL-2288 GD Rijswijk (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: EXPANDABLE TUBULAR ELEMENT FOR USE IN A WELLBORE

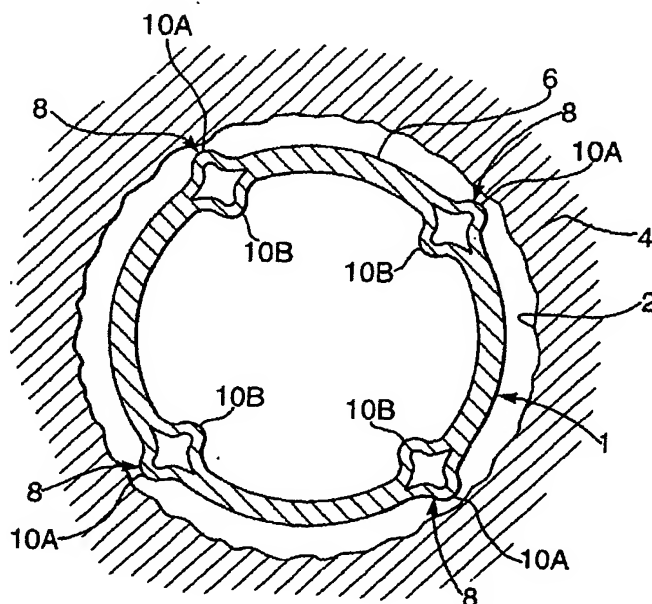

(57) Abstract: An expandable tubular element having a wall including at least a portion formed of a plurality of stacked wall layers, each wall layer having a bent configuration in a cross-sectional plane prior to radial expansion of the tubular element and being arranged to deform from the bent configuration to a more stretched configuration upon radial expansion of the tubular element.

WO 2004/016905 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

EXPANDABLE TUBULAR ELEMENT FOR USE IN A WELLBORE

The present invention relates to an expandable tubular element for use in a wellbore formed in an earth formation. The tubular element can be, for example, a casing which is installed in the wellbore to strengthen the borehole wall and to prevent collapse of the wellbore. In a conventional wellbore one or more casing strings are installed in the wellbore as drilling proceeds, whereby after drilling a new wellbore section a subsequent casing must pass through the previously installed casing strings. In view thereof the subsequent casing must be of smaller diameter than the previously installed casing strings. A consequence of such arrangement is that the wellbore diameter available for tools or fluids to pass through the wellbore becomes smaller with increasing number of casing strings (i.e. with increasing depth).

It has been proposed to alleviate this problem by installing each subsequent casing in a manner that the subsequent casing extends only for a short length into the previous casing rather than into the whole length of the previous casing. Such subsequent casing is then generally referred to as a liner. By radially expanding the subsequent casing after its installation at the required depth to an inner diameter substantially equal to the inner diameter of the previous casing, or just the wall thickness smaller, it is achieved that a decrease of the available inner diameter with depth is significantly reduced or avoided. Even if the subsequent casing is only expanded to the extent that its inner diameter is the

wall thickness smaller than the inner diameter of the previous casing, a significant reduction of the telescoping effect of conventional casing schemes is achieved.

5 However, it has been found that the expansion forces required to expand the tubular element are generally high. The problem is even more pronounced at the overlapping portions of subsequent casing sections. In view of such high expansion forces there is a risk that
10 the expander which is moved (e.g. by pulling, pushing, rotating or pumping) through the tubular element to expand same, becomes stuck in the tubular element. Also there is a risk that tubular element, or a connector thereof, bursts as a result of the high expansion forces.

15 Accordingly it is an object of the invention to provide an improved expandable tubular element for use in a wellbore, which overcomes the problem indicated above.

 In accordance with the invention there is provided an expandable tubular element having a wall including at
20 least a portion formed of a plurality of stacked wall layers, each wall layer having a bent configuration in a cross-sectional plane prior to radial expansion of the tubular element and being arranged to deform from the bent configuration to a more stretched configuration upon
25 radial expansion of the tubular element.

 Each wall layer deforms elastically/plastically during the expansion process, from the bent configuration to the more stretched configuration. The bending moment required for unbending a single wall layer is
30 proportional to the thickness (h) of the wall layer to the power three (i.e. h^3). For n wall layers, the total bending moment required to deform all wall layers simultaneously is therefore $n \cdot h^3$. It will be understood

that such total bending moment is significantly lower than the bending moment required to unbend a wall portion not formed of stacked wall layers (i.e. a solid wall portion) and of thickness $n \cdot h$. Namely the latter bending moment is proportional to $(n \cdot h)^3$ which is significantly larger than $n \cdot h^3$. In consequence thereof the expansion force required to expand the tubular element provided with the stacked wall layers is significantly lower than for a tubular element not provided with the stacked wall layers, but which is otherwise similar in shape and mechanical properties. After the radial expansion process, the tensile strength in circumferential direction of the tubular element is similar to that of a conventional tubular element (i.e. not provided with the stacked wall layers). This is an important feature since the burst pressure after radial expansion is virtually unaffected by the provision of the stacked wall layers.

Suitably said wall layers have mutually different bending curvatures prior to expansion of the tubular element.

In an attractive embodiment of the tubular element of the invention, the tubular element is one of a pair of tubes whereby an end part of an inner tube extends into an end part of an outer tube, and wherein said portion of stacked wall layers is included in one of said end parts. Preferably said portion of stacked wall layers is included in the end part of the outer tube.

Sliding of the wall layers along each during unbending other is promoted if a layer of lubricant or coating of low friction is included between each pair of adjacent wall layers.

The invention will be described hereinafter in more detail and by way of example with reference to the accompanying drawings in which:

Fig. 1 schematically shows an embodiment, in cross-section, of an expandable tubular element according to the invention;

Fig. 2 schematically shows a detail of the embodiment of Fig. 1 before radial expansion of the tubular element;

Fig. 3 schematically shows the detail of Fig. 2 after radial expansion of the tubular element; and

Fig. 4 schematically shows the tubular element of Fig. 1 after radial expansion thereof.

In the Figures like reference numerals relate to like components.

Referring to Fig. 1 there is shown a tubular element in the form of a wellbore casing 1 extending substantially coaxially into a wellbore 2 formed into an earth formation 4. The casing 1 has a wall 6 which includes a number of portions 8 formed of a pair of stacked wall layers 10A, 10B. Each portion 8 of stacked wall layers 10A, 10B extends in substantially longitudinal direction of the casing 1. The thickness (h) of each wall layer 10A, 10B is about half the thickness (t) of the sections of wall 6 inbetween the portions 8. The wall layer 10A of each pair has been bent radially outward, and the wall layer 10B of the pair has been bent radially inward.

In Fig. 2 is shown one of the wall portions 8 in more detail, whereby it is shown that a slit 12 extends through the wall 6 so as to divide the wall into wall layers 10A, 10B.

In Fig. 3 is shown the wall portion 8 after radial expansion of the casing 1, whereby the wall layers 10A,

10B have been plastically deformed from the bent configuration shown in Fig. 2 to a configuration in which the wall layers 10A, 10B have been stretched so as to extend substantially in circumferential direction of the casing 1. The slit 12 now also extends in substantially circumferential direction of the casing 1.

During normal use the casing 1 is to be positioned into a newly drilled portion of the wellbore. Therefore the casing 1 is lowered through a previously installed casing (not shown) whereby the casing 1 has the retracted configuration shown in Fig. 1. Thus the largest outer diameter of the casing 1 must be smaller than the inner diameter of the previously installed casing. After the casing 1 has been positioned at the desired depth, an expander mandrel (not shown) is moved through the casing 1 in order to radially expand the casing 1 to a diameter substantially equal to the diameter of the previously installed casing. During the expansion process the wall portions 8 are stretched in circumferential direction whereby the wall layers 10A, 10B plastically deform from the bent configuration of Fig. 2 to the stretched configuration of Fig. 3.

The bending moment required to deform each wall layer 10A, 10B from the bent configuration to the stretched configuration is proportional to the thickness (h) to the power third, i.e. proportional to h^3 . This is because the bending moment is proportional to the surface moment of inertia I_z for bending about an axis z extending in longitudinal direction of the casing 1, and because I_z is proportional to h^3 . Therefore the total bending moment (M_t) required to deform the two wall layers 10A, 10B simultaneously is proportional to $2 \cdot h^3$. The bending moment required to bent a portion of

the wall 6 without slit is proportional to t^3 . With $t = 2 \cdot h$ it follows that such bending moment is proportional to $8 \cdot h^3$. Thus, the bending moment M_t required to deform each wall portion 8 from the bent configuration to the stretched configuration is significantly lower than the bending moment required to bent a portion of the wall 6 without slit. Consequently, the expansion force required to expand the casing 1 from the retracted configuration (Fig. 1) to the expanded configuration (Fig. 4) is significantly lower than the expansion force which would be required to expand a tube without the slits 12 and whereby expanding mechanism is bending of the wall of the tube (e.g. expansion of a corrugated tube without slits).

Furthermore, it will be understood that after radial expansion the casing 1 has a resistance against collapse due to external pressure, and a resistance against burst due to internal pressure, comparable to a similar tube without slits. This can be understood by considering that there is no reduction in wall thickness at the locations of the slits 12, i.e. the total wall thickness at these locations is $2 \cdot h = t$.

Instead of providing the tubular element with separate portions of stacked wall layers along the circumference, the stacked wall layers can extend along the entire circumference of the tubular element. In such application the tubular element can, for example, have a corrugated shape prior to expansion.

The volume enclosed by the wall layers 10A, 10B prior to expansion, forms a cavity 20 which can be filled with a fluid, for example a lubricant or coating to promote sliding of said adjacent wall layers 10A, 10B along each other during expansion of the tubular element.

To accommodate the volume change of the cavity 20 during expansion of the tubular element 1, at least one of the wall layers 10A, 10B can be provided with an opening (not shown) arranged to allow fluid to be expelled from the cavity 20 during expansion of the tubular element 1.

Preferably the fluid forms a bonding agent or a compound for forming a bonding agent, which bonding agent is suitable to bond said adjacent wall layers 10A, 10B to each other or to bond the tubular element to a wall (not shown) extending adjacent the tubular element 1. In case the bonding agent bonds the adjacent wall layers 10A, 10B to each other, a significant increase of the collapse strength of the tubular element 1 is achieved after its expansion.

The wall to which the tubular element 1 can be bonded can be, for example, the wall of another tubular element (not shown) or the wall of the wellbore 2 into which the tubular element 1 extends.

Suitably said cavity forms a first cavity containing a first bonding compound for forming a bonding agent, and wherein a second said cavity (not shown) contains a second compound which reacts with the first compound to form the bonding agent.

C L A I M S

1. An expandable tubular element having a wall including at least a portion formed of a plurality of stacked wall layers, each wall layer having a bent configuration in a cross-sectional plane prior to radial expansion of the tubular element and being arranged to deform from the bent configuration to a more stretched configuration upon radial expansion of the tubular element.
2. The expandable tubular element of claim 1, wherein said wall layers have mutually different bending curvatures prior to radial expansion of the tubular element.
3. The expandable tubular element of claim 1 or 2, including a plurality of said portions of stacked wall layers spaced along the circumference of the tubular element.
4. The expandable tubular element of claim 1 or 2, wherein said portion of stacked wall layers extends along the full circumference of the tubular element.
5. The expandable tubular element of claim 4, wherein the tubular element has, prior to radial expansion thereof, a corrugated shape.
6. The expandable tubular element of any one of claims 1-5, wherein the tubular element is one of a pair of tubes whereby an end part of an inner tube extends into an end part of an outer tube, and wherein said portion of stacked wall layers is included in one of said end parts.

7. The expandable tubular element of claim 6, wherein said portion of stacked wall layers is included in the end part of the outer tube.

5 8. The expandable tubular element of any one of claims 1-7, wherein the tubular element includes at least one cavity, each cavity being formed between a pair of adjacent wall layers prior to expansion of the tubular element, said cavity containing a body of fluid.

10 9. The expandable tubular element of claim 8, wherein said fluid forms a lubricant or coating to promote sliding of said adjacent wall layers along each other during expansion of the tubular element.

15 10. The expandable tubular element of claim 8 or 9, wherein at least one of said adjacent wall layers is provided with an opening arranged to allow fluid from said body of fluid to be expelled from the cavity during expansion of the tubular element.





20 11. The expandable tubular element of claim 10, wherein said fluid forms a bonding agent or a compound for forming a bonding agent, which bonding agent is suitable to bond said adjacent wall layers to each other or to bond the tubular element to a wall extending adjacent the tubular element.

25 12. The expandable tubular element of claim 11, wherein said wall is the wall of another tubular element or the wall of a wellbore into which the tubular element extends.

30 13. The expandable tubular element of any one of claims 10-12, wherein said cavity forms a first cavity containing a first bonding compound for forming a bonding agent, and wherein a second said cavity contains a second compound which reacts with the first compound to form the bonding agent.

14. The expandable tubular element of any one of claims 1-13, wherein the tubular element extends into a borehole formed in an earth formation.

5 15. The expandable tubular element substantially as described hereinbefore with reference to the drawings.

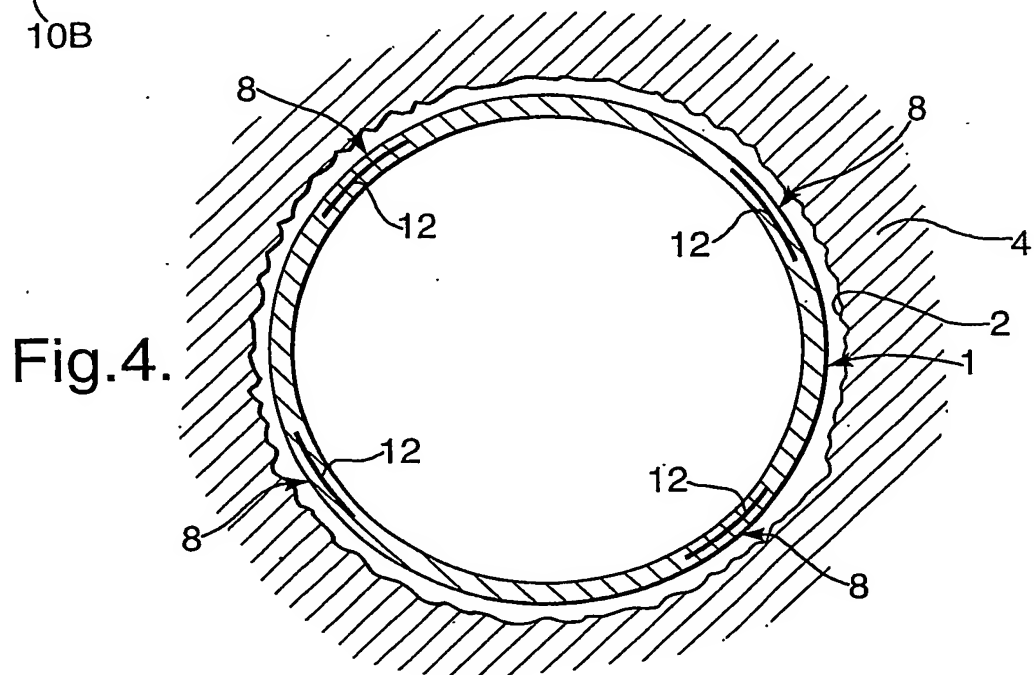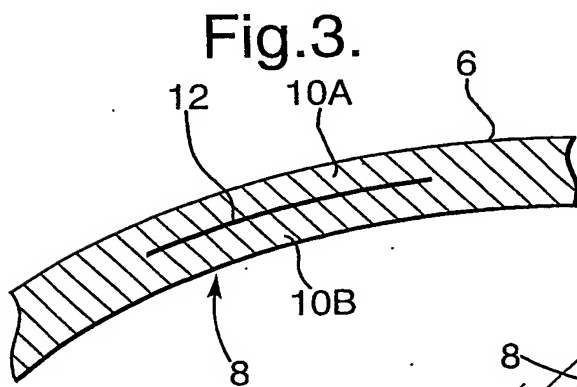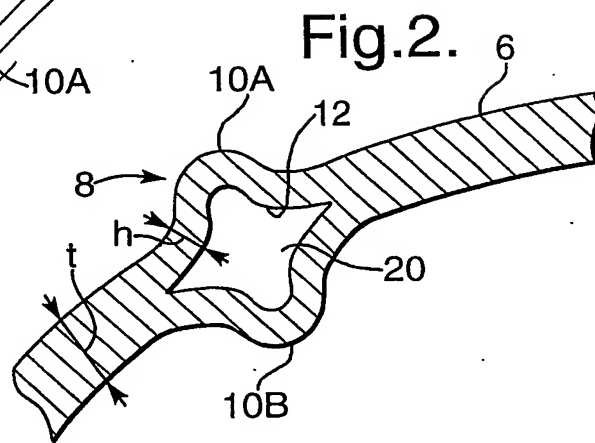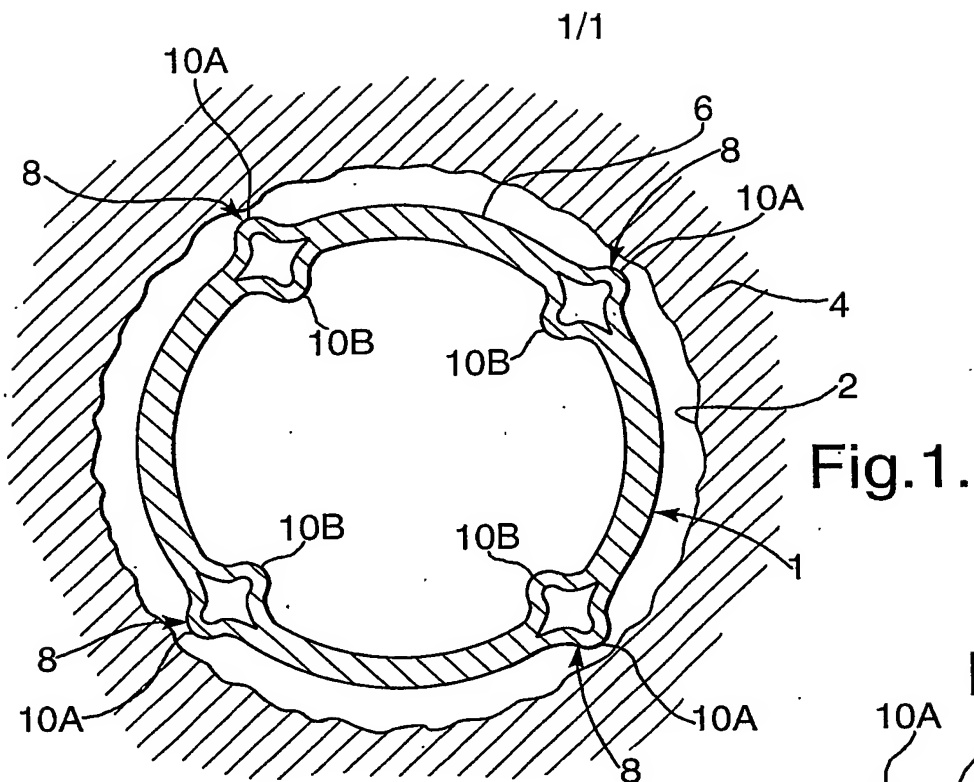

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/08843

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E21B43/10 C09J5/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E21B C09J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, TULSA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 20125 A (METCALFE PAUL DAVID ;WEATHERFORD LAMB (US)) 22 March 2001 (2001-03-22) page 3, line 13 -page 4, line 4; figures 6,7 page 5, line 2-11	1-6,8, 10,14,15
X	EP 1 152 120 A (HALLIBURTON ENERGY SERV INC) 7 November 2001 (2001-11-07) paragraphs '0082!-'0089!; figures 9,10,13,14	1-5,8, 10,14,15
X	WO 99 56000 A (SHELL CANADA LTD ;LOHBECK WILHELMUS CHRISTIANUS (NL); SHELL INT RE) 4 November 1999 (1999-11-04) page 12, line 34 -page 13, line 26; figure 12	1,2,8, 14,15
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

2 January 2004

Date of mailing of the international search report

12/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

van Berlo, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/08843

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 979 560 A (NOBILEAU PHILIPPE) 9 November 1999 (1999-11-09) column 6, line 13-33; figure 20 ----	1,4
A	WO 01 26860 A (ENVENTURE GLOBAL TECHNOLOGY ;DEAN BILL (US); COWAN MIKE (US); FILL) 19 April 2001 (2001-04-19) the whole document ----	9
A	EP 1 125 965 A (INST FRANCAIS DU PETROL) 22 August 2001 (2001-08-22) paragraph '0033! ----	11-13
A	US 6 073 692 A (WOOD EDWARD T ET AL) 13 June 2000 (2000-06-13) column 7, line 3-11 ----	11-13
A	EP 0 701 041 A (HALLIBURTON CO) 13 March 1996 (1996-03-13) the whole document -----	11-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/08843

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0120125	A	22-03-2001	AU 7031200 A CA 2383179 A1 EP 1212513 A1 WO 0120125 A1 GB 2354271 A ,B US 6513588 B1	17-04-2001 22-03-2001 12-06-2002 22-03-2001 21-03-2001 04-02-2003
EP 1152120	A	07-11-2001	US 6457518 B1 AU 3878601 A BR 0101997 A CA 2346441 A1 EP 1152120 A2 SG 91921 A1 US 2002129935 A1	01-10-2002 08-11-2001 26-12-2001 05-11-2001 07-11-2001 15-10-2002 19-09-2002
WO 9956000	A	04-11-1999	EP 0952305 A1 AU 743241 B2 AU 4361099 A BR 9909815 A CA 2328420 A1 CN 1298468 T DE 69906278 D1 DE 69906278 T2 DK 1080296 T3 EA 2235 B1 WO 9956000 A1 EP 1080296 A1 JP 2002513108 T NO 20005308 A NZ 507198 A	27-10-1999 24-01-2002 16-11-1999 19-12-2000 04-11-1999 06-06-2001 30-04-2003 11-12-2003 14-07-2003 28-02-2002 04-11-1999 07-03-2001 08-05-2002 20-10-2000 29-04-2003
US 5979560	A	09-11-1999	AU 733469 B2 AU 8880598 A CA 2304687 A1 EP 1012441 A1 WO 9913195 A1 NO 20001148 A US 6253852 B1	17-05-2001 29-03-1999 18-03-1999 28-06-2000 18-03-1999 07-03-2000 03-07-2001
WO 0126860	A	19-04-2001	AU 7867300 A CA 2385596 A1 GB 2373524 A NO 20021613 A WO 0126860 A1	23-04-2001 19-04-2001 25-09-2002 29-05-2002 19-04-2001
EP 1125965	A	22-08-2001	FR 2804686 A1 CA 2334496 A1 EP 1125965 A1 NO 20010645 A US 2001020053 A1	10-08-2001 08-08-2001 22-08-2001 09-08-2001 06-09-2001
US 6073692	A	13-06-2000	AU 756057 B2 AU 1736799 A CA 2264336 A1 GB 2335683 A ,B NO 991480 A	02-01-2003 07-10-1999 27-09-1999 29-09-1999 28-09-1999
EP 0701041	A	13-03-1996	US 5507346 A	16-04-1996

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/08843

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0701041	A	US 5564503 A	15-10-1996
		CA 2156981 A1	27-02-1996
		EP 0701041 A2	13-03-1996
		NO 953303 A	27-02-1996
		CA 2156977 A1	27-02-1996
		CA 2156982 A1	27-02-1996
		CA 2156983 A1	27-02-1996
		CA 2156984 A1	27-02-1996
		CA 2156987 A1	27-02-1996
		EP 1233144 A2	21-08-2002
		EP 1233142 A2	21-08-2002
		EP 1249574 A2	16-10-2002
		EP 0701042 A2	13-03-1996
		EP 0701044 A2	13-03-1996
		EP 0701040 A2	13-03-1996
		EP 0701045 A2	13-03-1996
		EP 0701043 A2	13-03-1996
		NO 953304 A	27-02-1996
		NO 953323 A	27-02-1996
		NO 953324 A	27-02-1996
		NO 953325 A	27-02-1996
		NO 953326 A	27-02-1996
		NO 20001342 A	27-02-1996
		SG 32473 A1	13-08-1996
		SG 34260 A1	06-12-1996
		SG 32475 A1	13-08-1996
		SG 32476 A1	13-08-1996
		SG 34261 A1	06-12-1996
		SG 32477 A1	13-08-1996
		US 5499680 A	19-03-1996
		US 5501281 A	26-03-1996
		US 5499681 A	19-03-1996
		US 5566763 A	22-10-1996
		US 5613559 A	25-03-1997
		US 5735350 A	07-04-1998